HOBART

701 S Ridge Avenue, Troy, OH 45374
1-888-4HOBART • www.hobartcorp.com

ACCESS – CLA SEMI-AUTO LABELING SYSTEM

STANDARD FEATURES

■ Access/CLA semi-automatic labeling system weighs and labels up to 28 packages per minute

■ Conveyor scale weighs up to 30 lb. x .01 increments

■ Simple, reliable operation

■ Left to right or right to left configurations

■ 4-position swivel wand lets you rotate labels in all four directions

■ Rugged stainless steel construction

■ Easy to clean sanitary design

ACCESSORIES

❏ ACCESS-WP3ST – Control panel post and BRKT-W3

❏ ACCESS-CLAKIT – Printer mounting adapter

❏ GRVCON-1 – 4' Gravity conveyor

❏ GRVCON-2 – 2' Fold down gravity conveyor (attaches to CLA)

❏ GRVCON-3 – 3' Fold down gravity conveyor (attaches to CLA)

MODELS

❏ CLA2-1 – Compact Label Applier
❏ ULTIMSC-2 – Scale/Conveyor for CLA

Specifications, Details and Dimensions on Reverse Side.

ACCESS – CLA SEMI-AUTO LABELING SYSTEM

HOBART

ACCESS – CLA SEMI-AUTO LABELING SYSTEM
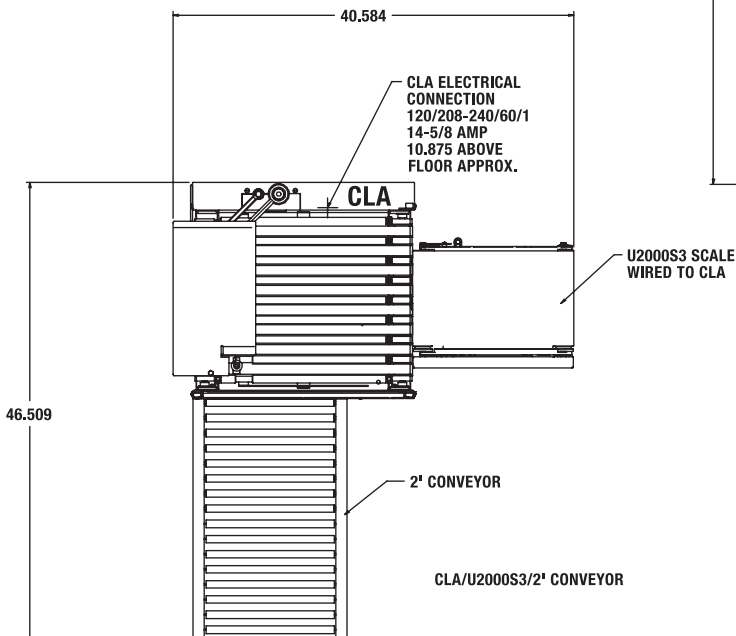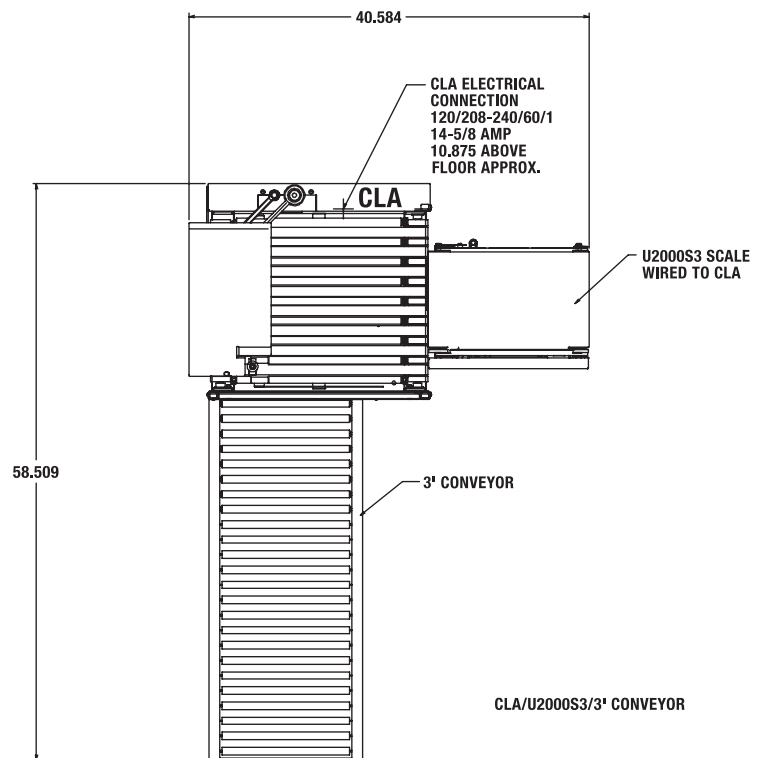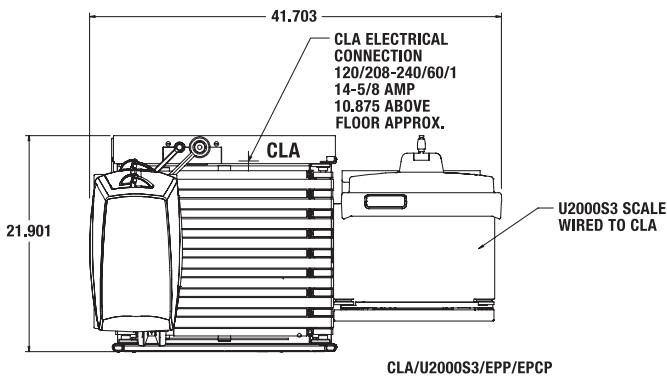
HOBART

SPECIFICATIONS

CONSTRUCTION: Heavy gauge stainless steel frame, legs and panels

DIMENSIONS: *System* – 22"D x 42"W x 40"H (65"H with EPP Printer & EPCP Control Panel)

ELECTRICAL: *CLA* – 120/208-240 (3 wire)/60/1; 14.5/8.0 amps

SHIPPING WEIGHT: *CLA2-1* – 261 lbs.; *ULTIMSC-2* – 36 lbs.; *ACCESS-W3PST* – 5 lbs. (total 305 lbs.)

DETAILS AND DIMENSIONS

41.703

CLA ELECTRICAL CONNECTION 120/208-240/60/1 14-5/8 AMP 10.875 ABOVE FLOOR APPROX.

CLA

21.901

U2000S3 SCALE WIRED TO CLA

CLA/U2000S3/EPP/EPCP

40.584

CLA ELECTRICAL CONNECTION 120/208-240/60/1 14-5/8 AMP 10.875 ABOVE FLOOR APPROX.

CLA

58.509

U2000S3 SCALE WIRED TO CLA

3' CONVEYOR

CLA/U2000S3/3' CONVEYOR

40.584

CLA ELECTRICAL CONNECTION 120/208-240/60/1 14-5/8 AMP 10.875 ABOVE FLOOR APPROX.

CLA

46.509

U2000S3 SCALE WIRED TO CLA

2' CONVEYOR

CLA/U2000S3/2' CONVEYOR

As continued product improvement is a policy of Hobart, specifications are subject to change without notice.

Printed On Recycled Paper